


GENERAL NOTES

- All materials and construction shall be in strict conformance with requirements of the City of Oroville and all County and State Codes.
- Approval of City Engineer or his authorized representative is required on completed work within the public right-of-way or drain easement prior to: (a) Placing of any concrete. (b) Placing of aggregate base. (c) Placing of asphaltic concrete. (d) Backfilling trenches for underground pipe. (e) Boring of sewer pipe. Work done without such approval shall be done at the contractor's risk. Such approval, when given, shall not relieve the contractor from the responsibility of performing the work in an acceptable manner.
- The types, locations, sizes, and or depths of existing underground utilities as shown on these improvement plans were obtained from sources of varying reliability. The contractor is cautioned that only actual excavation will reveal the number, types, extent, sizes, location, and depth of such underground utilities. However, GDA, DISCO, GAS ASSOCIATION (GDA) can assume no responsibility for the completeness or accuracy of its delineation of such underground utilities, nor for the existence of other buried objects or utilities which may be encountered, but which are not shown on these drawings.
- The contractor is hereby notified that prior to commencing construction, he is responsible for contacting the utility companies involved and requesting a certification at the construction site of the locations of such underground utilities where such facilities may possibly conflict with the placement of improvements shown on these improvement plans.
- Where GDA is to provide construction stakes, GDA will assume no responsibility whatsoever for improvements constructed therefrom, unless the following procedure is observed by the contractor:
 - The contractor shall, through the office of GDA, request construction stakes for any particular phase of the work at least seven (7) days prior to the planned use of said stakes. No request received from a sub-contractor will be recognized.
 - Where construction stakes are intended for use in setting concrete forms, the contractor shall, upon completion of form setting, contact the office of GDA to request a form check. If the stakes and alignment of the forms are not approved, certain corrections will be requested prior to permitting concrete to be placed. A representative of the contractor must be present at the form check. No authorization to place concrete will be given to a sub-contractor.
- Where GDA is to provide construction stakes for alignment and grades, they will be furnished to the contractor one (1) only. The spacing and offset of the stakes shall be coordinated with GDA by the contractor. Stakes and marks set by GDA shall be carefully preserved by the contractor. In case such stakes and markings are disrupted or damaged, the cost of replacing or restoring them will be deducted by the owner from any monies due the contractor. Requests for resetting lost stakes, or setting additional stakes, will be acknowledged by GDA only when authorized by the owner. The contractor shall be responsible for obtaining such authorization.
- Contractor shall be solely and completely responsible for condition of premises on which the work is performed and for safety of all persons and property on the site, both during and outside of normal working hours, until such work is accepted by the owner.
- Sufficient equipment shall be available to provide dust control at all times during earthmoving operations. Areas surrounding the work shall be kept clean and returned to original condition upon completion of this contract.
- The contractor shall, at all times, coordinate his work with that of others on the site.
- Trench safety plans: Before beginning excavation for a trench five (5) feet or more in depth, the contractor shall secure a permit from the California Division of Industrial Safety, (555 Rio Linda Road, Chico, California, Phone (916) 841-1151). A copy of this permit must be available at the construction site.



LOCATION MAP

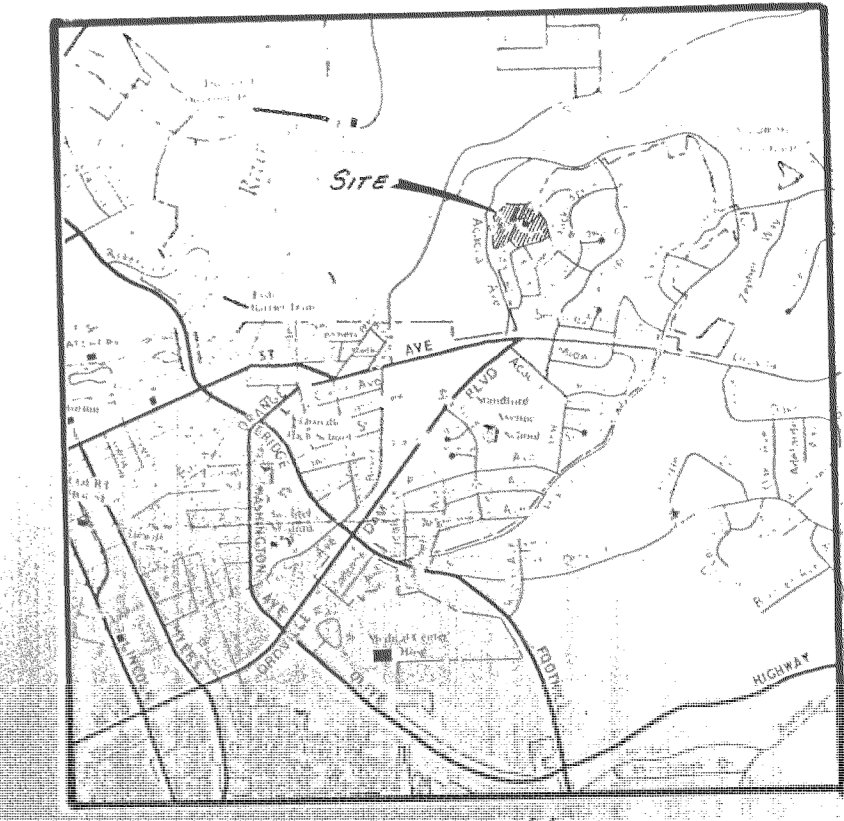


SEWER LAYOUT SCALE 1"100'


PROPOSED	LEGEND	EXISTING
	SANITARY SEWER	
	MANHOLE	
	CLEANOUT	
	SEWER SERVICE	
	STORM DRAIN	
	DROP INLET	
	WATER LINE	
	WATER VALVE	
	FIRE HYDRANT	
	SHALE	
	CONCRETE	

SHEET INDEX
 1. TITLE SHEET
 2. SEWER EXTENSION

APPROVED: *Kirt Hunter* DATE: 9-14-81
 KIRT HUNTER
 DIRECTOR OF PUBLIC WORKS
 CITY OF OROVILLE CA.

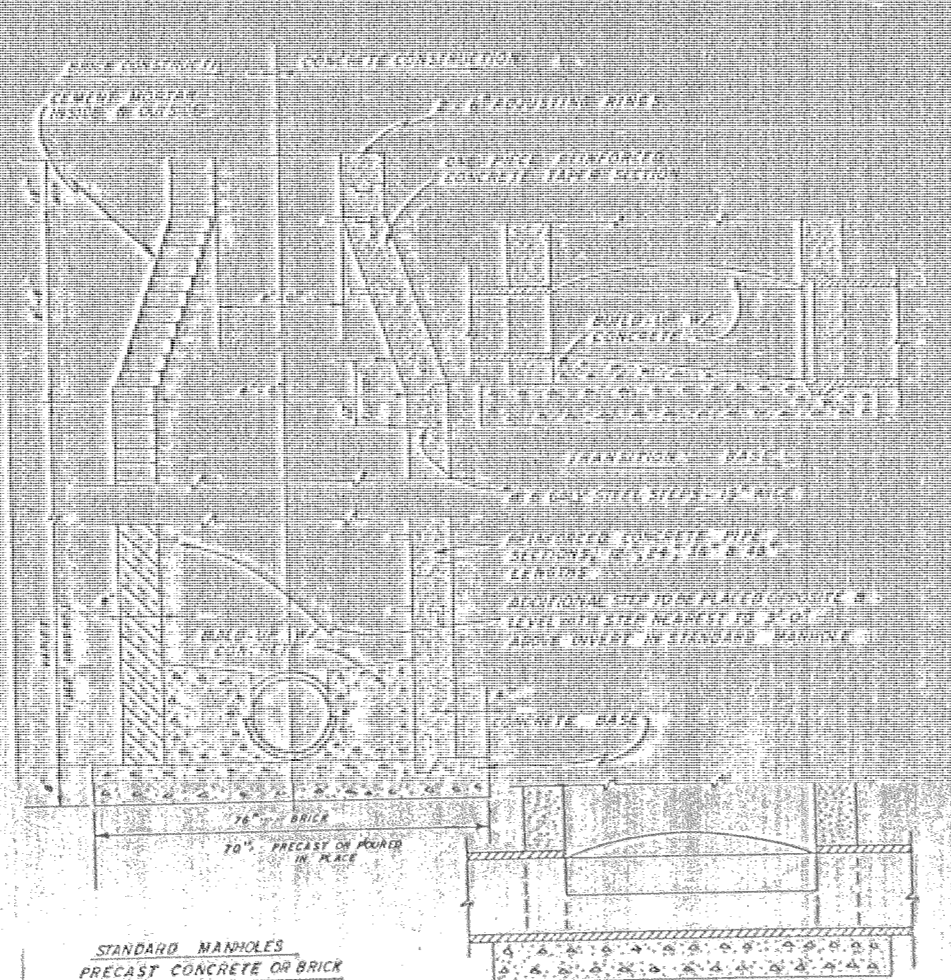

MANHOLE

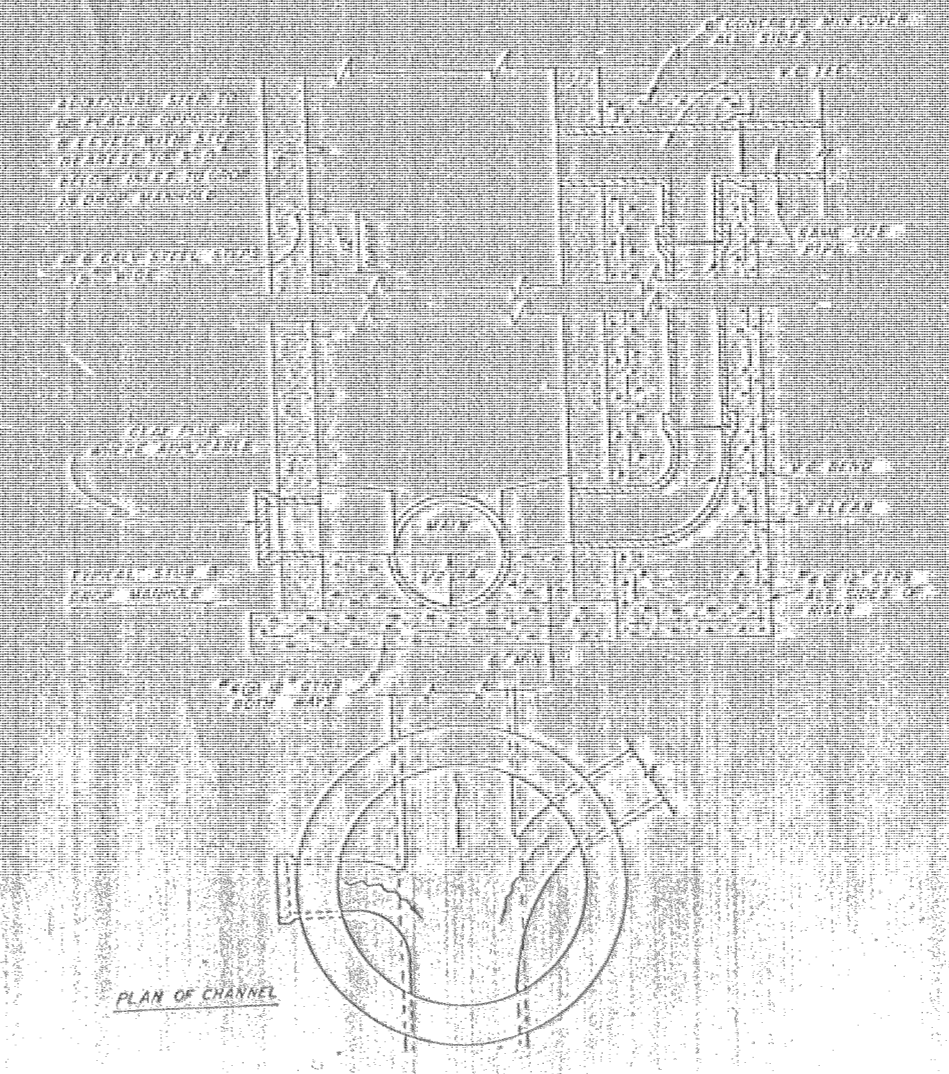

DROP MANHOLE

<table border="1"> <tr> <th>DATE</th> <th>NO</th> <th>REVISION</th> <th>BY</th> <th>APP'D</th> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	DATE	NO	REVISION	BY	APP'D						FIELD BOOK ELEVATION DATUM T.B.M. #8 ELEV. 930.50 BRIDGE SPIKE 1" HIGH N.E. FACE LEANING DIGGER DINE CITY OF OROVILLE DATUM	DRAWN 9-10-79 P.I. DESIGNED CHECKED SCALE AS SHOWN	APPROVED: <i>Kenneth P. Sembert</i> 9-8-81 DATE	GDDIS RISCOLL AND ASSOCIATES ENGINEERING SURVEYING PLANNING 463 070 DAN BLVD. SUITE OROVILLE, CALIF. 95965 (916) 538-2068	SEWER LINE EXTENSION FOR DWIGHT KOONCE CITY OF OROVILLE CALIFORNIA	SHEET 1 OF 2 SHEETS JOB NO 79-068 SS-297
DATE	NO	REVISION	BY	APP'D												