




CITY OF OROVILLE DEPARTMENT OF PUBLIC WORKS

STANDARD FOR TRASH ENCLOSURE

DRAWN BY.

RICK WALLS, P.E. DIRECTOR OF PUBLIC WORKS DEPARTMENT

SHEET 1 OF 5 MS-11

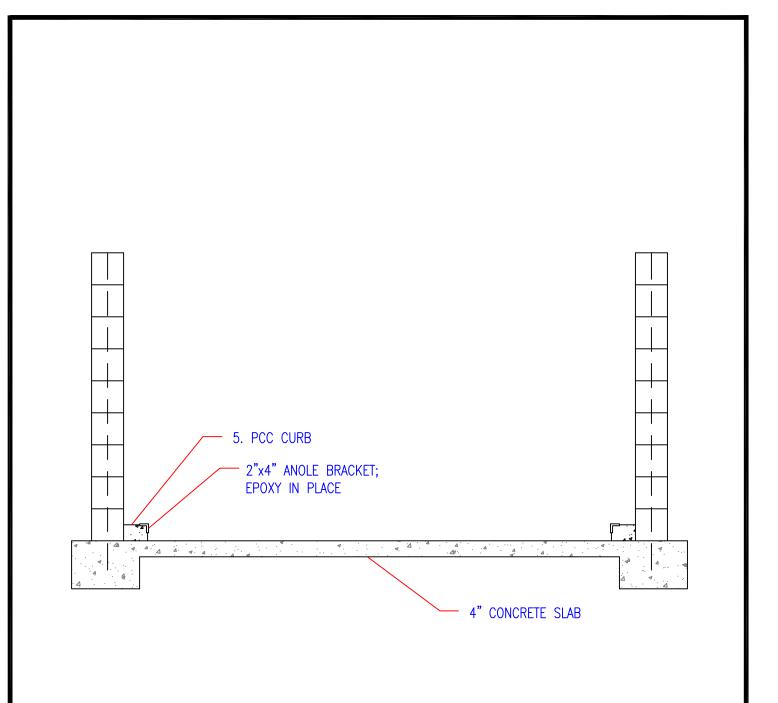




CITY OF OROVILLE DEPARTMENT OF PUBLIC WORKS


STANDARD FOR
TRASH ENCLOSURE

DRAWN BY.


RICK WALLS, P.E. DIRECTOR OF PUBLIC WORKS DEPARTMENT

SHEET 2 OF 5 MS-11

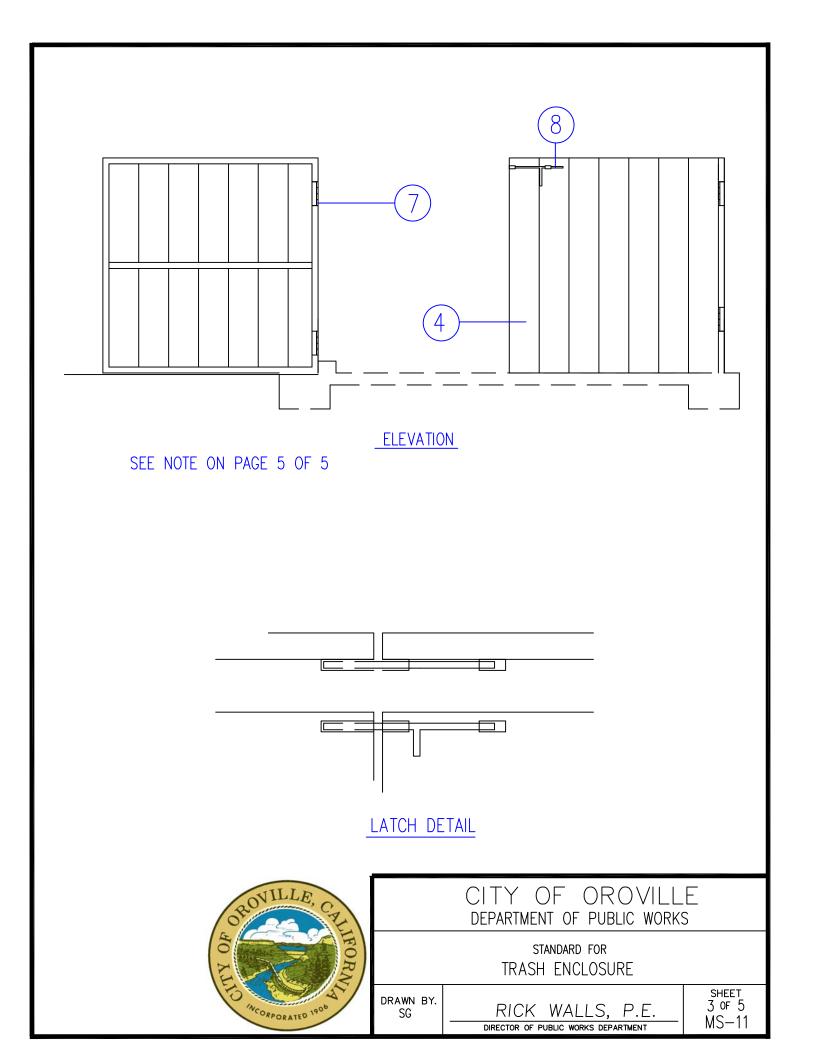

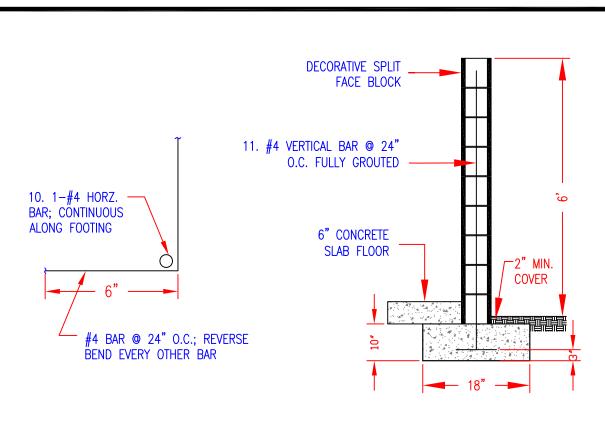

BLOCK ENCLOSURE

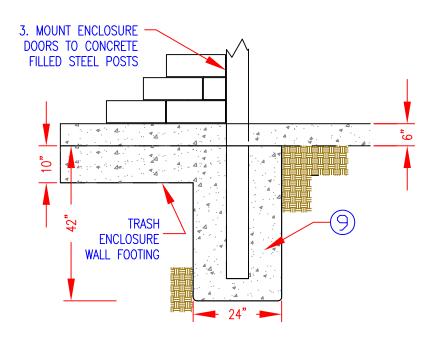

DOOR FOOTING



CITY OF OROVILLE DEPARTMENT OF PUBLIC WORKS

STANDARD FOR TRASH ENCLOSURE

DRAWN BY.

RICK WALLS, P.E.
DIRECTOR OF PUBLIC WORKS DEPARTMENT

SHEET 4 OF 5 MS-11

NOTES:

- 1. 4" PCC FOUNDATION, EXTENDING 4" BEYOND ENCLOSURE WALLS, OVER 95% COMPACTED BASE.
- 2. 8"x8"x16", 6' HIGH SPLIT BLOCK MASONRY WALLS COORDINATED TO COMPLEMENT SURROUNDING ARCHITECTURE.
- 3. 6" SQUARE ¾6" THICK STEEL JAMB TUBES, CONCRETE FILLED. 2" CLEARENCE BETWEEN TUBE AND WALLS.
- 4. 16 GA. RIBBED METAL GATES WITH 2"x2"x 1/4" STEEL ANGLE IRON FRAME AND DIAGONAL BRACING. CONTINUOUS WELD ALL JOINTS.
- 5. 6"x6" PCC CURB.
- 6. 6" THICK PCC LOADING PAD (SLAB ON GRADE) OVER 95% COMPACTED BASE, 4% MAXIMUM SLOPE.
- 7. METAL HINGE, CONTINUOUSLY WELDED TO GATE AND JAMB TUBE.
- 8. INSTALL WELDED UPPER MOUNT LATCHING ASSEMBLY PER DETAIL.
- 9. 48" DEEP BY 24" DIAMETER PCC FOOTING FOR GATE POSTS.
- 10. #4 BAR 24" O/C EACH WAY.
- 11. 1 #4 BAR TOP CORD.
- 12. #4 BAR CONTINUOUS IN 18"-WIDE BY 10"-DEEP FOOTING UNDER WALLS AND GATE OPENINGS.
- 13. PEDESTRIAN ACCESS IS REQUIRED IF IN RESIDENTIAL OR MULTI-TENANT AREAS. CONSULT PLANNING DEPARTMENT FOR REQUIREMENTS.



CITY OF OROVILLE DEPARTMENT OF PUBLIC WORKS

STANDARD FOR TRASH ENCLOSURE KEYNOTES AND GEN. NOTES

DRAWN BY.

RICK WALLS, P.E.

SHEET 5 OF 5 MS-11