

TYPICAL PVC HOUSE LATERAL ASSEMBLY

NOTES:

- 1. CITY WILL TAP ALL LATERAL CONNECTIONS MADE TO THE MAIN.
- 2. 4" ABS OR SDR 35 PVC PIPE SHALL BE USED FROM MAIN TO PROPERTY LINE, 3" MAY BE USED FROM THERE TO HOUSE.




CITY OF OROVILLE DEPARTMENT OF PUBLIC WORKS

STANDARD FOR
SEWER LATERAL TO MAIN CONNECTION

DRAWN BY. SG

RICK WALLS, P.E.

SHEET 1 OF 3 SS-13

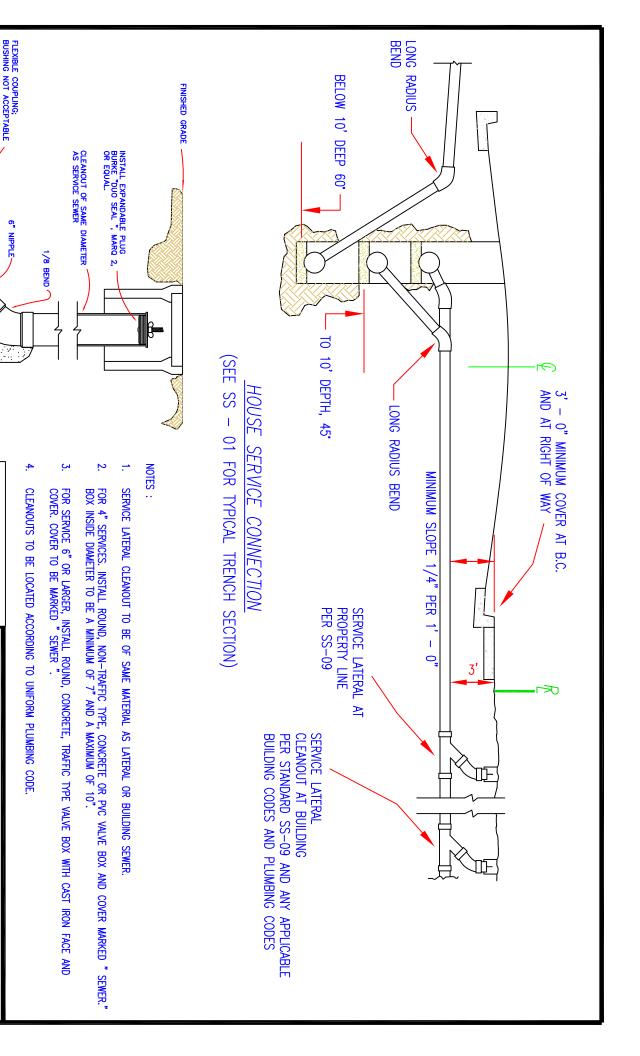

SERVICE SEWER BY
GENERAL CONTRACTOR
(SAME MATERIAL AS LATERAL)

COMPACTED SAND BEDDING MATERIAL

CITY

"NCORPORATED 1906

DRAWN BY.

DIRECTOR OF PUBLIC WORKS DEPARTMENT RICK WALLS,

P.E.

SHEET 2 OF 3 SS—13

OF


MAOAI

STANDARD FOR SEWER LATERAL TO MAIN CONNECTION

DEPARTMENT OF PUBLIC WORKS

9

OROVILLE



TYPICAL FOR P.V.C. PIPE

NOTES:

- 1. ALL TAPS ARE TO BE DONE BY CITY OF OROVILLE PERSONAL
- 2. SHORING IS TO BE IN PLACE BEFORE TAPPING BY THE CONTRACTOR IF THE TRENCH IS FIVE FEET OR DEEPER.
- A FOUR INCH MINIMUM SIZE LATERAL IS TO BE USED, STARTING AT THE MAIN TO PROPERTY LINE.
- 4. MANHOLES ARE TO BE INSTALLED WHENEVER A LINE LARGER THAN FOUR INCHES IN DIAMETER INTERSECTS THE MAIN LINE.
- 5. BACKFILL PIPE ZONE SHALL BE BACKFILLED WITH 3/8" CRUSHED ROCK.
- 6. BACKFILL MATERIAL SHALL BE 100% IMPORTED MATERIAL AND COMPACTED TO 95% RELATIVE DENSITY OR APPROVED BY CITY ENGINEER.
- 7. TRENCH AND PIPE LAYING SHALL CONFORM TO SS-01 "STANDARDS FOR TRENCH DETAIL AND STANDARD FOR LAYING SANITARY SEWER PIPE".
- 8. ALL LATERALS TO BE LEAK TESTED ACCORDING TO CITY STANDARS.
- FOR LATERALS BEING CONSTRUCTED IN A NEW SUBDIVISION, THE LATERAL SHALL BE EXTENDED A
 MINIMUM OF 1 FOOT BEYOND THE PUBLIC UTILITY EASEMENT AND SHALL BE STUBBED ABOVE
 GROUND AND CAPPED.
- 10. FOR LATERALS BEING CONSTRUCTED IN A NEW SUBDIVISION, AN "S" SHALL BE STAMPED INTO THE CURB FACE CENTERED ON THE SEWER LATERAL



CITY OF OROVILLE DEPARTMENT OF PUBLIC WORKS

STANDARD FOR
SEWER LATERAL TO MAIN CONNECTION

DRAWN BY. SG

RICK WALLS, P.E. DIRECTOR OF PUBLIC WORKS DEPARTMENT

SHEET 30F 3 SS-13